



## 6.3 护套系列 Jacket Series





### ■ 技术参数 SPECIFICATIONS

- ▶ 温度范围 (Temperature range) : -40℃ ~ +105℃
- ▶ 额定电压 (Voltage rating) : 250V.AC/DC
- ▶ 额定电流 (Current rating) : 15A
- ▶ 接触电阻 (Contact resistance) :  $\leq 0.01\Omega$
- ▶ 绝缘电阻 (Insulation resistance) :  $\geq 1000M\Omega$
- ▶ 保持力 (Retentinal Force) : 6.0kgf/min
- ▶ 材料 (Material) :
  - 壳体 (Housing) : 尼龙 (Nylon) UL94V-2
  - 端子 (Terminal) : 黄铜 (Brass Tin/plated)
- ▶ 端子锁紧力 (Terminal Locking Force) : 8.0kgf/min

### 端子型号规格

#### Terminal specification and type


型号 Type	适用线规 Applicable wires		材料 Material	尺寸 Dimensions (mm)			
	mm <sup>2</sup>	AWG#		W	L	E	材料厚度 Thidckness
CS63004-DU-21T-S	0.31~0.89	22~18	黄铜 Brass	7.6	22.8	6.5	0.4
CS63004-DU-61T-S	0.76~2.09	18~14		7.6	22.8	6.5	0.4
CS63004-DU-91T-S	1.75~5.4 ( $\phi 0.8$ SOLID)	12~10		7.6	22.8	6.5	0.4

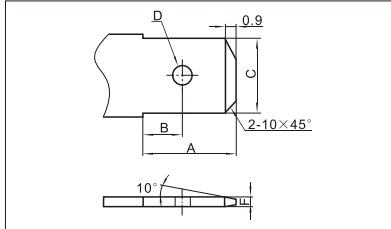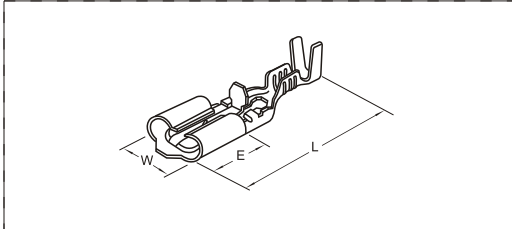


型号 Type	尺寸 Dimensions (mm)				
	A	B	C	D	F
.250"	8.3	3.6	6.35	$\phi 2.0$	0.8

### 护套型号规格

#### Jacket specification and type

	型号 Type	尺寸 Dimensions (mm)			适配端子 Suitable Terminal
		L	T	W	
	CS63004U (172076)	28	7.3	10.2	CS63004-DU-21T-S CS63004-DU-61T-S CS63004-DU-91T-S

	型号 Type	尺寸 Dimensions (mm)			适配端子 Suitable Terminal
		L	T	W	
	CS63006U (179970-1)	22.1	7.3	9.7	CS63004-DU-21T-S CS63004-DU-61T-S CS63004-DU-91T-S